

# Industrial Robot

*An International Journal*

## **Omni-directional vehicle control based on body configuration**

**Daisuke Chugo**

*Graduate School of Information Systems, The University of Electro-Communications, Tokyo, Japan*

**Kuniaki Kawabata**

*Intelligent System Research Unit, The Institute of Physical and Chemical Research (RIKEN), Saitama, Japan*

**Hayato Kaetsu**

*Intelligent System Research Unit, The Institute of Physical and Chemical Research (RIKEN), Saitama, Japan*

**Hajime Asama**

*Research into Artifacts, Center for Engineering (RACE), The University of Tokyo, Chiba, Japan*

**Taketoshi Mishima**

*Graduate School of Science and Engineering, Saitama University, Saitama, Japan*



## Industrial Robot

ISSN 0143-991X

©2009 Emerald Group Publishing Limited

Editor Dr Clive Loughlin, CEng, MIET  
17 Old Lane, Low Mill Village, Addingham, Ilkley,  
West Yorkshire LS29 0SA, UK  
Tel: +44 (0) 1943 830 399  
E-mail: [CliveLoughlin@engineeringfirst.com](mailto:CliveLoughlin@engineeringfirst.com)  
[www.emeraldinsight.com/ir.htm](http://www.emeraldinsight.com/ir.htm)

Assistant Editor  
Joanne Pransky  
E-mail: [joannepransky@engineeringfirst.com](mailto:joannepransky@engineeringfirst.com)

Associate Editors  
Richard Bloss  
Robert Bogue  
Christine Connolly  
Sheng-jen "Tony" Hsieh  
Yoshihiro Kusuda

Publisher Harry Colson

Assistant Publisher Gemma Halder

### Editorial Advisory Board

Hojjat Adeli  
*The Ohio State University, USA*  
Redha Benhadj-Djilali  
*Kingstons University, UK*  
John Billingsley  
*University of Southern Queensland, Australia*  
Rob Buckingham  
*OC Robotics Ltd, UK*  
Darwin Caldwell  
*Italian Institute of Technology, Italy*  
Denis Chamberlain  
*City University, UK*  
Venkatesh Dubey  
*Bournemouth University, UK*  
Charlie Duncheon  
*Artificial Muscle Inc., USA*  
Joe Engelberger  
*Consultant, USA*  
John Evans  
*Consultant, USA*  
John Gray  
*University of Salford, UK*  
Richard Greenhill  
*The Shadow Robot Company, UK*  
Masatoshi Ishikawa  
*University of Tokyo, Japan*  
Michael Kassler  
*Michael Kassler Associates, Australia*  
Andreas Koschan  
*The University of Tennessee, Knoxville, USA*  
Yueh-Jaw Lin  
*The University of Akron, USA*  
Honghai Liu  
*University of Portsmouth, UK*  
Andreas Nearchou  
*University of Patras, Greece*  
Geoff Pegman  
*R.U. Robots Limited, UK*


Richard Piggitt  
*Rockwell Automation, UK*  
J. Roberto Pires  
*University of Coimbra, Portugal*  
John Pretlove  
*ABB Corporate Research, Norway*  
Paul Ranky  
*New Jersey Institute of Technology, USA*  
Shinsuke Sakakibara  
*Fanuc Ltd, Japan*  
David Sanders  
*University of Portsmouth, UK*  
Hagen Schempl  
*Carnegie Mellon University Robotics Institute, USA*  
Geary V. Soska  
*The Goodyear Tire & Rubber Company, USA*  
Paul Taylor  
*R&T Mechatronics Ltd, UK*  
Nick Tillett  
*Tillett and Hague Technology Ltd, UK*  
Osman Tokhi  
*University of Sheffield, UK*  
William Townsend  
*Barrett Technology Inc., USA*  
James Trevelyan  
*The University of Western Australia, Australia*  
Alexander Vert  
*Fraunhofer IPA, Germany*  
Gurvinder Virk  
*Massey University, New Zealand*  
John Weston  
*Manufacturing Support Group, UK*  
Mike Wilson  
*British Automation and Robot Association, UK*  
Ken Young  
*University of Warwick, UK*

Indexed and abstracted in  
Abstracts in New Technologies and  
Engineering  
Applied Science & Technology Index  
CompuMath Citation Index  
CSA Abstracts in New Technologies and  
Engineering  
CSA Aerospace and High Technology Database  
CSA Civil Engineering Abstracts  
CSA Computer and Information Systems  
Abstracts  
CSA Earthquake Engineering Abstracts  
CSA Electronics and Communication Abstracts  
CSA Mechanical & Transport Engineering  
Abstracts (Priority)  
CSA Solid State and Superconductivity  
Abstracts

Current Contents/Engineering, Computing &  
Technology  
Engineering Index Monthly  
Expanded Academic Database  
INSPEC Database  
Institute of Metals  
International Packaging Abstracts  
ISI Alerting Services  
Paper and Board Abstracts  
PNA Research  
Printing Abstracts  
Research Alert  
Research Trends in Advanced Manufacturing  
SciSearch  
Scopus  
Zetoc Electronic Table of Contents



Awarded in recognition of  
Emerald's production department's  
adherence to quality systems and  
processes when preparing  
scholarly journals for print



Emerald Group Publishing Limited,  
Howard House, Environmental  
Management System has been  
certified by ISOQAR to  
ISO14001:2004 standards

Cover image: Barrett Technology Inc. BH8-26a BarrettHand. The hand is totally self-contained with all motor controllers and embedded intelligence located inside its palm. It weighs only 1kg, yet has a payload of 6kg

*Industrial Robot* provides up-to-date coverage of international activities that relate to the design and application of industrial and service robot systems. Coverage is essentially of a practical nature and designed to be of benefit to those working in the field. Proven applications are covered together with company news and new product information. *Industrial Robot* now also includes research articles that reflect the most interesting and strategically important research and development activities from around the world. A double-blind review process ensures the validity and relevance of all academic articles.

This journal is also available online at:

### Journal information

[www.emeraldinsight.com/ir.htm](http://www.emeraldinsight.com/ir.htm)

### Table of contents

[www.emeraldinsight.com/0143-991X.htm](http://www.emeraldinsight.com/0143-991X.htm)

Emerald Group Publishing Limited  
Howard House, Wagon Lane,  
Bingley BD16 1WA, United Kingdom  
Tel +44 (0) 1274 777700  
Fax +44 (0) 1274 785201  
E-mail [emerald@emeraldinsight.com](mailto:emerald@emeraldinsight.com)



INVESTOR IN PEOPLE

### Regional offices:

**For Americas**  
Emerald Group Publishing Inc., One Millin Place, 119 Mount Auburn Street, Suite 400,  
Harvard Square, Cambridge, MA 02138, USA  
Tel +1 617 576 5782  
E-mail [americas@emeraldinsight.com](mailto:americas@emeraldinsight.com)

**For Asia Pacific**  
Emerald, 7-2, 7th Floor, Menara KLM, Bandar Puchong Jaya, 47100 Puchong, Selangor, Malaysia  
Tel +60 3 8076 6009; Fax +60 3 8076 6007  
E-mail [asia@emeraldinsight.com](mailto:asia@emeraldinsight.com)

**For Australia**  
Emerald, PO Box 1441, Fitzroy North, VIC 3068, Australia  
Tel/Fax +61 (0) 3 9486 2782; Mobile +61 (0) 4315 98476  
E-mail [australasia@emeraldinsight.com](mailto:australasia@emeraldinsight.com)

**For China**  
Emerald, 7th Xueyuan Road, Haidian District, Room 508, Hongyu Building, 100083 Beijing,  
People's Republic of China  
Tel +86 108-230-6438  
E-mail [china@emeraldinsight.com.cn](mailto:china@emeraldinsight.com.cn)

**For India**  
Emerald, 301, Vikas Surya Shopping Mall, Mangalam Place, Sector -3, Rohini,  
New Delhi - 110085, India  
Tel +91 112 794 8437/8  
E-mail [india@emeraldinsight.com](mailto:india@emeraldinsight.com)

**For Japan**  
Emerald, 92-5 Makigahara, Asahi-ku, Yokohama 241-0836, Japan  
Tel/Fax +81 45 367 2114  
E-mail [japan@emeraldinsight.com](mailto:japan@emeraldinsight.com)

**For African enquiries**  
E-mail [africa@emeraldinsight.com](mailto:africa@emeraldinsight.com)

**For European enquiries**  
E-mail [europa@emeraldinsight.com](mailto:europa@emeraldinsight.com)

**For Middle Eastern enquiries**  
E-mail [middEast@emeraldinsight.com](mailto:middEast@emeraldinsight.com)

**Customer helpdesk:**  
Tel +44 (0) 1274 785278; Fax +44 (0) 1274 785201;  
E-mail [support@emeraldinsight.com](mailto:support@emeraldinsight.com)  
Web [www.emeraldinsight.com/customercenter](http://www.emeraldinsight.com/customercenter)

**Orders, subscription and missing claims enquiries:**  
E-mail [subscriptions@emeraldinsight.com](mailto:subscriptions@emeraldinsight.com)  
Tel +44 (0) 1274 777700; Fax +44 (0) 1274 785201

Missing issue claims will be fulfilled if claimed within six months of date of despatch.  
Maximum of one claim per issue.

Hard copy print backsets, back volumes and back issues of volumes prior to the current and previous year can be ordered from Periodical Service Company.  
Tel +1 518 537 4700; E-mail [ps4@periodicals.com](mailto:ps4@periodicals.com)  
For further information go to [www.periodicals.com/emerald.html](http://www.periodicals.com/emerald.html)

**Reprints and permission service**  
For reprint and permission options please see the abstract page of the specific article in question on the Emerald web site ([www.emeraldinsight.com](http://www.emeraldinsight.com)), and then click on the "Reprints and permissions" link. Or contact:  
Copyright Clearance Center- Rightslink  
Tel +1 877/622-5543 (toll free) or 978/777-9929  
E-mail [customerservice@copyright.com](mailto:customerservice@copyright.com)  
Web [www.copyright.com](http://www.copyright.com)

No part of this journal may be reproduced, stored in a retrieval system, transmitted in any form or by any means electronic, mechanical, photocopying, recording or otherwise without either the prior written permission of the publisher or a licence permitting restricted copying issued in the UK by The Copyright Licensing Agency and in the USA by The Copyright Clearance Center. No responsibility is accepted for the accuracy of information contained in the text, illustrations or advertisements. The opinions expressed in the articles are not necessarily those of the Editor or the publisher.

Emerald is a trading name of Emerald Group Publishing Limited

Printed by Printheus Group Ltd, Scirocco Close,  
Moulton Park, Northampton NN3 6HE

# Omni-directional vehicle control based on body configuration

*Daisuke Chugo*

Graduate School of Information Systems, The University of Electro-Communications, Tokyo, Japan

*Kuniaki Kawabata and Hayato Kaetsu*

Intelligent System Research Unit, The Institute of Physical and Chemical Research (RIKEN), Saitama, Japan

*Hajime Asama*

Research into Artifacts, Center for Engineering (RACE), The University of Tokyo, Chiba, Japan, and

*Taketoshi Mishima*

Graduate School of Science and Engineering, Saitama University, Saitama, Japan

## Abstract

**Purpose** – The purpose of this paper is to develop a new wheel control scheme for wheeled vehicle with passive linkage mechanism which realizes high step-overcoming performance.

**Design/methodology/approach** – Developing wheeled vehicle realizes omni-directional motion on flat floor using special wheels and passes over non-flat ground using the passive suspension mechanism. The vehicle changes its body shape and wheel control references according to ground condition when it runs over the rough terrain.

**Findings** – Utilizing the proposed wheel control scheme, the slip ratio and the disturbance ratio of the wheel reduce when the vehicle passes over the step and its step-overcoming performance is improved.

**Originality/value** – The paper's key idea is modification of its kinematic model referring to the body configuration dynamically and using this model for wheel control of the vehicle. The controller adjusts the wheel control references when the vehicle passes over the rough terrain changing the body shape and reduces the slippage and the rotation error of wheels.

**Keywords** Control systems, Vehicle suspension systems, Robotics

**Paper type** Research paper

## 1. Introduction

In recent years, mobile robot technologies are expected to perform various tasks in general structured environment such as nuclear power plants, large factories, welfare care facilities, hospitals, and homes. However, there are narrow spaces with steps and slopes in such indoor environments, and it is difficult for general car-like vehicles to run around there.

Generally, the vehicle is required to have quick and efficient mobile function for effective task execution. The omni-directional mobility is useful for the tasks, especially in narrow spaces, because there is no holonomic constraint on its motion (Campion *et al.*, 1996; Ichikawa, 1995). Furthermore, the step-overcoming function is necessary when the vehicle passes over the general environment which has vertical gaps between two or

plural flat floors. Thus, in order to run around general environment, the vehicle needs to equip both of functions.

In related works, various types of omni-directional mobile systems are proposed (legged robots, ball-shaped wheel robots, crawler robots, and so on). The legged robot (Endo and Hirose, 1999; Hirukawa *et al.*, 2005) can move in all directions and has high ability of passing over unevenness and large steps in natural environment. However, its energy efficiency is not so good because the mechanisms tends to be complicated and the robot need to use its actuators in order to only maintain its posture. Therefore, for the structured environment, these robots are over speck. The robot with ball-shaped wheels can run in all directions (Wada and Asada, 1999), however, it cannot run over the small gaps. The special crawler mechanism (Hirose and Amano, 1993) is also proposed for the omni-directional mobile robot, but which can climb over only small steps. Special wheeled robots can move all directions with simple mechanism same as a normal wheeled vehicle. However, there is a fatal demerit that the robots with the universal wheels can nearly pass over the unevenness of a ground in the force free directions (Ferriere and Campion, 1996). Thus, there is still a lack of well-adapted mobile system for both narrow spaces and irregular terrain operation.

---

The current issue and full text archive of this journal is available at [www.emeraldinsight.com/0143-991X.htm](http://www.emeraldinsight.com/0143-991X.htm)



Industrial Robot: An International Journal  
36/5 (2009) 461–468  
© Emerald Group Publishing Limited [ISSN 0143-991X]  
[DOI 10.1108/01439910910980187]

Therefore, we are developing a holonomic omni-directional vehicle with step-climbing ability (Yamashita *et al.*, 2001; Chugo *et al.*, 2003). Our vehicle utilizes new passive suspension system, which is suitable for steps in the structured environment, and it has seven special wheels with DC motors, which are controlled, respectively. Thus, the vehicle has the redundant actuators and the mobile system calculates the control reference of each wheel based on the kinematics model and controls each actuator. When our vehicle passes over the irregular terrain, the body shape changes by the ground condition and the kinematic model changes together. Therefore, it is required that our mobile system changes the kinematic model referring the modification of the body shape dynamically.

Many mobile vehicles, which have the passive suspension system, are developed (Bickler, 1993; Stone, 1996; Estier *et al.*, 2000). However, in many cases, these researches do not discuss the body configuration. Lamon already discusses the body configuration for 3D-odometry (Lamon and Siegwart, 2003), however, they do not discuss the kinematics model and control reference of each actuator. The unsuitable control reference, which is calculated by fixed kinematic model, will cause to make the vehicle takes unstable posture and the wheel slippage, and the performance of step-overcoming will become poor.

In general, mobile vehicle for rough terrain uses traction control scheme for wheel control. In our previous works, we discussed the wheel feedback control system considering with the output traction of each wheel (Chugo *et al.*, 2005a, b). However, it is difficult to coordinate the rotation velocities of each wheel using only the traction control, especially, when the change of body configuration is large.

Thus, we propose the wheel control method, which is according to the body shape. Our proposed method realizes that the mobile vehicle passes over the irregular terrain with stably posture by reducing the slippage and the rotation error of the wheels. Our control method improves the vehicle performance of passing over the irregular terrain. Our key idea is that our controller changes the kinematic model referring to the modification of the body shape dynamically. Using our proposed method, the controller can adjust the wheel control references based on this kinematic model when our vehicle passes over the rough terrain changing the body shape. We verify the performance of the proposed control method through the computer simulations and experiments.

This paper is organized as follows: we introduce the mechanical design and the controller of the vehicle in Section 2; we discuss the new proposed control method in Section 3; we show the results of computer simulations and experiments in Section 4; Section 5 is conclusion of this paper.

## 2. Mobile platform

### 2.1 Mobile mechanism

For practical use, it is important for the vehicle to design a reasonable mechanism that has no excessive performance. Generally, running on the structured terrain (Thianwiboon *et al.*, 2001), the energy efficiency of the wheeled mobile system is better than the other mobile mechanisms (e.g. legged or crawler type). Thus, we adopt the universal wheel for omni-directional mobile function. The universal wheel realizes the omni-directional mobility with the advantage of a wheeled system. Furthermore, when we design a mobile robot, there are two approaches to improve the step-climbing


ability of the robot. One is to improve the step-climbing ability in all the directions equally, and the other is to improve the maximum ability to pass over steps in a fixed direction with simple mechanism. If the robot has a holonomic and omni-directional mobile ability, it can change its direction in front of the step. Therefore, to realize low cost system, we design the holonomic omni-directional wheeled robot which passes the step only in forward and backward direction.

Figure 1 shows the prototype vehicle system. The vehicle has seven wheels and each wheel is connected to single DC motor. The size of prototype vehicle is 750 mm (L) × 540 mm (W) × 520 mm (H) and its weight is 22 kg.

The mobile mechanism consists of seven special wheels with free rollers and a passive suspension system. The special wheel equips 12 cylindrical free rollers (Figure 2; Asama *et al.*, 1995) and realizes to generate the omni-directional motion using plural wheels arranged in the different direction and suitable wheel control.

Our mechanism utilizes new passive suspension system, which is more suitable for the step than general rocker-bogie suspensions as shown in Figure 3 (Chugo *et al.*, 2005a, b). The free joint point 1 is in the same height as the axle and this system helps that the vehicle can pass over the step smoothly when the wheel contacts it (Figure 4). No sensors and no additional actuators are equipped to pass over the irregular terrain.

Figure 1 Overview of the proposed mechanism

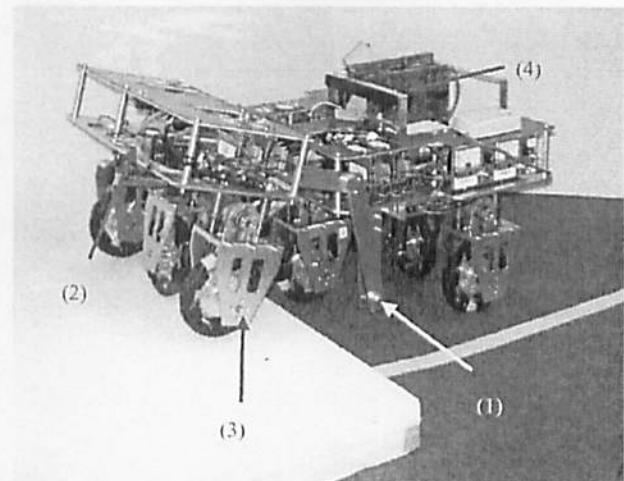

Notes: (1) is the passive joint 1 (pitch angle); (2) is the passive joint 2 (roll angle); (3) is the special wheel; and (4) is the control computer system (CPU and I/O card)

Figure 2 Special wheel

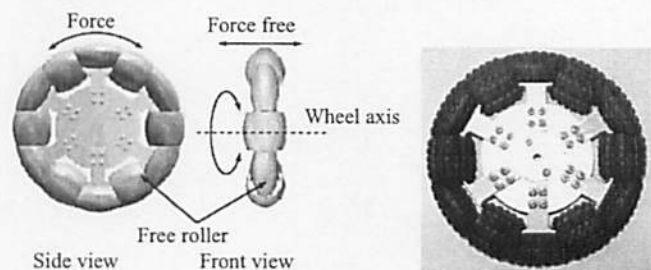


Figure 3 New passive linkage mechanism


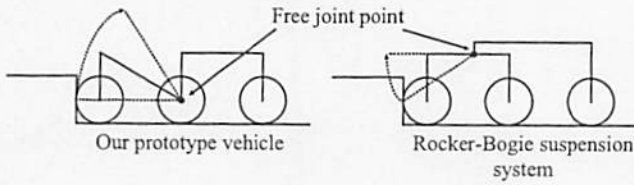


Figure 4 Step climbing

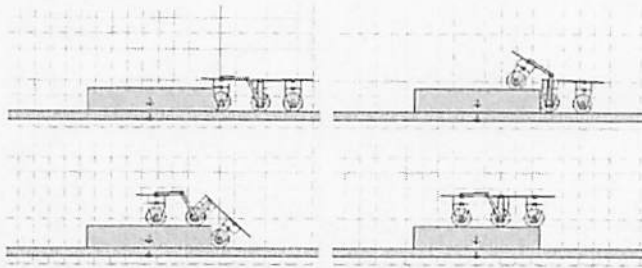

2.2 Controller

The control system is shown in Figure 5. The developed vehicle has seven motor drivers, two potentiometers each joint for the configuration angle and two tilt meters for the inclination of the body. Our vehicle has redundant actuation system using seven wheels and proportional-integral-derivations (PID)-based control system (Chugo et al., 2005a, b) synchronizes the wheel rotation based on control reference, which is calculated by the kinematic model.


3. Control system

3.1 Passing over the step

In general, the wheeled vehicle for rough terrain drives all wheels and has redundant actuators. Therefore, the vehicle system calculates from its reference speed to the actuator velocity commands based on its kinematic model (Carlisle, 1979). However, the passive suspension mechanism changes the body shape and it is required to modify its kinematic model.

If the system does not modify the vehicle's kinematic model, the actuator velocity commands are unsuitable to an

Figure 5 Overview of the vehicle's control system

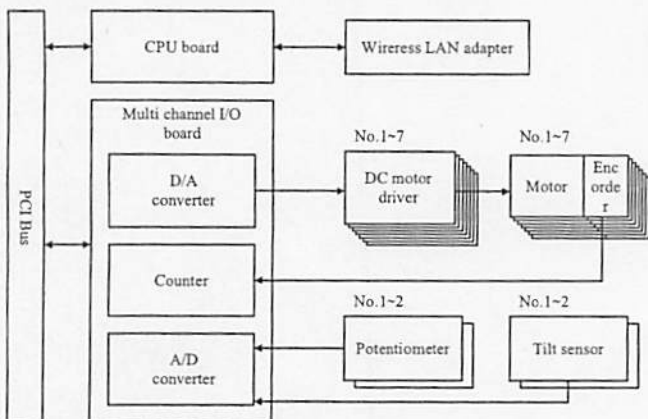

actual situation because of the difference between an actual body configuration and assumed configuration of the model used for calculation. The unstable command leads the wheel slips or blocks during passing over the step and these actions cause that the vehicle loses the balance of the body posture as shown in Figure 6. Thus, we proposed a wheel control method based on the body configuration information.

3.2 Sensor setup

Our vehicle has two potentiometers on each passive joint and tilt sensors which are attached on the rear part of the vehicle body as shown in Figure 7.

We can measure the following angles using these sensors:


- The roll angle  $\theta_a$  and pitch angle  $\gamma_a$  of the body shape from potentiometers.
- The roll angle  $\theta_b$  and pitch angle  $\gamma_b$  of the body inclination from tilt sensors.

Our developed vehicle is designed on the assumption that it passes over non-flat ground in only forward or backward direction. The body shape angle changes to only the advance direction, therefore, we only consider the roll angle ( $\theta_a$  and  $\theta_b$ ).

3.3 Kinematics modification

Figure 8 shows the arrangement of the wheels (we display as wheel  $i$ :  $i = 1 \dots 7$ ) and the definition of the coordinates, the length of each links, and the rotate speed of each wheel,

Figure 6 The off-balance situation on the irregular terrain

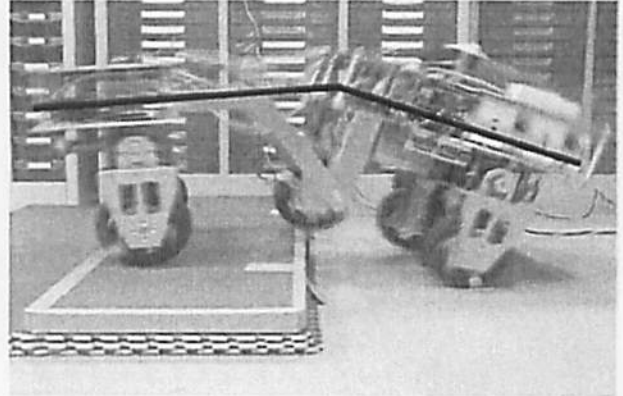

Note: Middle wheel is not grounded and it causes a reducing of step-overcoming performance

Figure 7 The angle meters


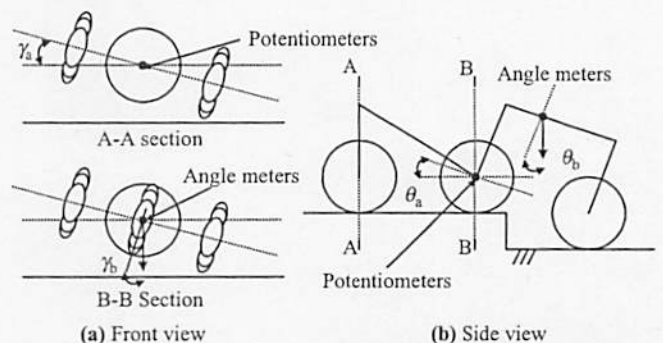


Figure 8 Coordination and parameters

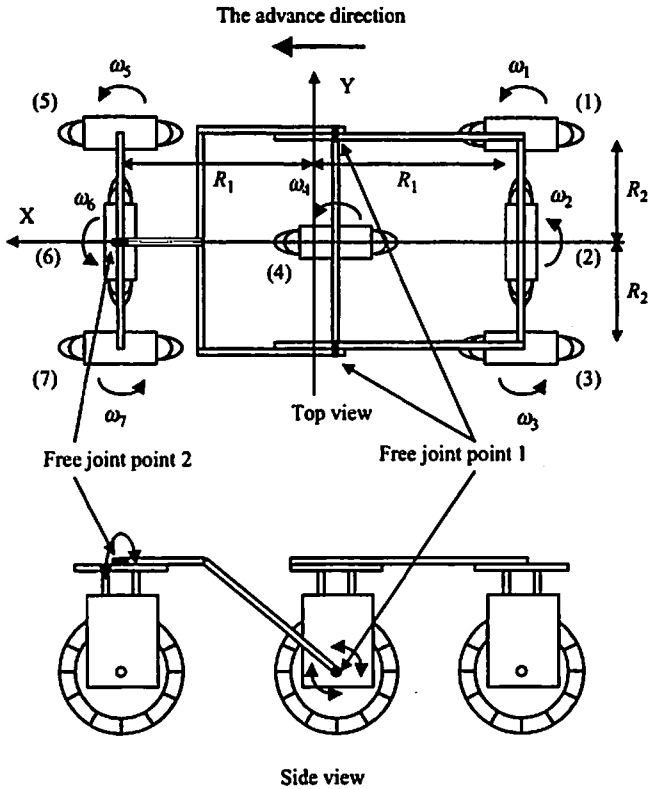

respectively.  $R_1$  and  $R_2$  indicate the length of each links and  $\omega_1, \dots, \omega_7$  are the rotation velocity of each wheel. The relations between the rotation velocity of each wheel  $\omega_i$  and the rotation velocity of each actuator  $v_i$  are calculated in equation (1):

$$\omega_i = kv_i \tag{1}$$

where  $i$  is the number of wheel ( $i = 1 \dots 7$ ) and  $k$  is gear ratio on the actuator.

The wheels 1 and 3 are located on the same straight line and symmetrically on X-axis, therefore the rotation velocity of the wheel 1 is equal to one of the wheel 3 when the vehicle moves forward (Carlisle, 1979). The same relation on Y-axis is realized also about wheels 5 and 7:

$$\omega_1 = -\omega_3 \tag{2}$$

$$\omega_5 = -\omega_7 \tag{3}$$

As the same, when the vehicle moves beside, the rotational velocity of wheel 2 must be equal to the rotation velocity of wheel 6:

$$\omega_2 = -\omega_6 \tag{4}$$

Now, we consider the geometric relationships among the velocity vector of the front wheel (wheels 5 and 7), the middle wheel (wheel 4) and the rear wheel (wheels 1 and 3) when the vehicle passes over the step.

Now, we consider the geometric relationships among the velocity vector of the front wheel (wheels 5 and 7), the middle wheel (wheel 4) and the rear wheel (wheels 1 and 3) when the vehicle passes over the step.

When the vehicle passes over the slope at an incline of  $\alpha$  deg, the position relationship and the velocity vector relationship of wheels 1, 4 and 5 are shown in Figure 8. Figure 9 shows the frame-kinematic model of the vehicle body and we can consider this model as the slider link mechanism. In this model, the slider is the slope surface and the pin joint is the axle point of the wheel. The pin joints are attached on the slider and connected by the link. The degree of the potentiometer is  $-\theta_a$  and the degree of the tilt sensor is  $\theta_b$ .

The body's instantaneous center point of the wheels 1 and 4 is  $P_{41}$  in Figure 8 and the center point of the wheels 4 and 5 is  $P_{54}$ . Now, we discuss the relationship between wheels 1 and 4 using  $P_{41}$ . Equation (5) is derived from geometry in Figure 8:

$$h = a \cos(\alpha - \theta_b) = b \cos \theta_b \tag{5}$$

$a$  and  $b$  are the distance between  $P_{41}$  and the wheels 4 and 5, respectively.  $h$  is the length of the perpendicular vector to link 2. Therefore, equation (6) shows the relationship of the velocity of wheels 4 and 5. Moreover, from equation (2), equation (7) is derived:

$$v_1 = \frac{\cos(\alpha - \theta_b)}{\cos \theta_b} v_4 \tag{6}$$


$$v_3 = -\frac{\cos(\alpha - \theta_b)}{\cos \theta_b} v_4 \tag{7}$$

Also, from the view of  $P_{54}$ , the relationship of the velocity of wheels 4 and 5 are expressed in equations (8) and (9) is calculated by using equation (3):

$$v_5 = \frac{\cos(\theta_a + \theta_b)}{\cos\{\alpha - (\theta_a + \theta_b)\}} v_4 \tag{8}$$

$$v_7 = -\frac{\cos(\theta_a + \theta_b)}{\cos\{\alpha - (\theta_a + \theta_b)\}} v_4 \tag{9}$$

Figure 9 The relation of the body shape and steps

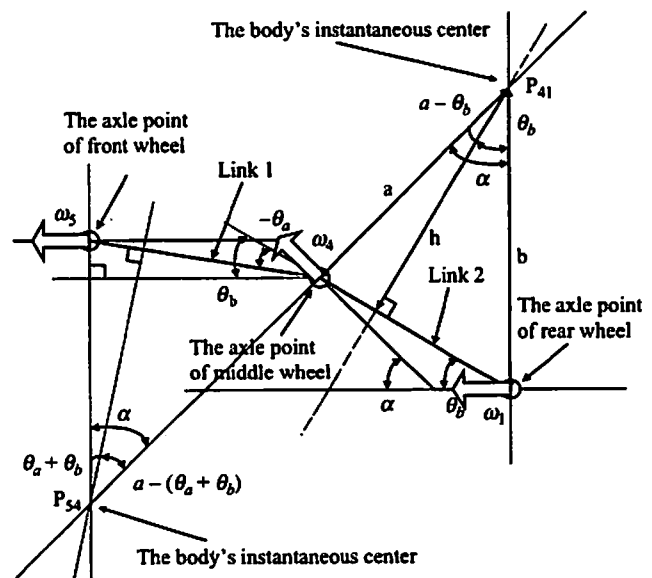

After all, utilizing these equations, following equations are derived:

$$\dot{x} = \frac{1}{5} \left( \frac{\cos \theta_2}{\cos(\alpha - \theta_2)} v_1 - \frac{\cos \theta_2}{\cos(\alpha - \theta_2)} v_3 + v_4 + \frac{\cos\{\alpha - (\theta_1 + \theta_2)\}}{\cos(\theta_1 + \theta_2)} v_5 - \frac{\cos\{\alpha - (\theta_1 + \theta_2)\}}{\cos(\theta_1 + \theta_2)} v_7 \right) \quad (10)$$

$$\dot{y} = \frac{1}{2} (-v_2 + v_6) \quad (11)$$

$$\dot{\theta} = \frac{1}{6} \left( \frac{v_1}{R_2} + \frac{v_2}{R_1} + \frac{v_3}{R_2} + \frac{v_4}{R_2} + \frac{v_6}{R_1} + \frac{v_7}{R_2} \right) \quad (12)$$

Thus, equation (13) is derived as follows:

$$\dot{X} = J(\theta_a, \theta_b) \cdot V \quad (13)$$

$V = [v_1 \dots v_7]^T$  is rotation velocity vector of each actuator,  $\dot{X} = [\dot{x} \ \dot{y} \ \dot{\theta}]^T$  is the velocity vector of vehicle motion and  $J(\theta_a, \theta_b)$  is the Jacobian matrix based on body configuration:

$$J(\theta_a, \theta_b) = kr \cdot \begin{bmatrix} \frac{\cos(\alpha - \theta_b)}{5 \cos \theta_b} & 0 & -\frac{\cos(\alpha - \theta_b)}{5 \cos \theta_b} & \frac{1}{5} \\ 0 & -\frac{1}{2} & 0 & 0 \\ \frac{1}{6R_2} & \frac{1}{6R_1} & \frac{1}{6R_2} & 0 \\ \frac{\cos(\theta_a + \theta_b)}{5 \cos\{\alpha - (\theta_a + \theta_b)\}} & 0 & -\frac{\cos(\theta_a + \theta_b)}{5 \cos\{\alpha - (\theta_a + \theta_b)\}} \\ 0 & \frac{\cos \gamma}{2} & 0 \\ \frac{1}{6R_2} & \frac{1}{6R_1} & \frac{1}{6R_2} \end{bmatrix} \quad (14)$$

Therefore, the control reference value of each actuator can be calculated by equation (15):

$$V = J^+(\theta_a, \theta_b) \cdot \dot{X} \quad (15)$$

where  $J^+(\theta_a, \theta_b)$  is pseudo-inverse of Jacobian matrix:

$$J^+(\theta_a, \theta_b) = (J^T J)^{-1} J^T = \frac{1}{kr} \cdot \begin{bmatrix} \cos \theta_b / \cos(\alpha - \theta_b) & 0 & R_2 \\ 0 & -1 & R_1 \\ -\cos \theta_b / \cos(\alpha - \theta_b) & 0 & R_2 \\ 1 & 0 & 0 \\ \cos\{\alpha - (\theta_a + \theta_b)\} / \cos(\theta_a + \theta_b) & 0 & R_2 \\ 0 & 1 & R_1 \\ -\cos\{\alpha - (\theta_a + \theta_b)\} / \cos(\theta_a + \theta_b) & 0 & R_2 \end{bmatrix} \quad (16)$$

Thus, the vehicle system must synchronize the rotation velocity of the wheels according to equation (15).

### 3.4 Traction control

In our control system, we utilize PID-based torque control method (Chugo *et al.*, 2005a, b). The torque reference of each wheel is calculated by equation (17):

$$\tau_i = k_p e + k_i \int e dt + k_d \frac{de}{dt} \quad (17)$$

where  $e$  is error value and  $k_p, k_i, k_d$  are proportional, integral and derivative gain of PID controller, respectively.

This control method adjusts the control reference may not exceed the marginal torque. The controller calculates the coefficient  $c_i$  as follows:

$$c_i = \begin{cases} (\tau_{\max} / \tau_i) & \text{if } \tau_i > \tau_{\max}, \\ 1 & \text{if } \tau_i \leq \tau_{\max}, \end{cases} \quad (18)$$

where  $\tau_{\max}$  is marginal torque of the actuator.

The torque output is calculated by equation (19):

$$\tau_i^{\text{out}} = c \cdot \tau_i \quad \text{where } c = \min\{c_1, \dots, c_7\} \quad (19)$$

Comparing from  $c_1$  to  $c_7$ , the controller can maintain each wheel's rotation velocity.

## 4. Experiment

### 4.1 Simulation setup


We verify the performance of our proposed controller which uses our proposed control reference based on its body shape by computer simulations. Here, we discuss the vehicle motion in the direction of the X-axis in Figure 8, because our vehicle passes over the step in its forward and backward direction. As initial conditions, simulation parameters are chosen from the prototype model. The parameters are shown in Table I.

In order to verify that proposed system is effective, we test two situations. In simulation (1), the vehicle runs on 45° slope as shown in Figure 10(a). The height of slope is 0.09 m and

Table I Vehicle parameters

Length	Front 195 mm
	Rear 400 mm
Body weight	Front 7.8 kg
	Rear 13.8 kg
Wheel diameter	132 mm
Distance between wheels	Front 255 mm
	Rear 215 mm
Friction coefficient	Static 0.4
	Dynamic 0.3
Running speed	0.25 m/sec

Figure 10 Simulation setup

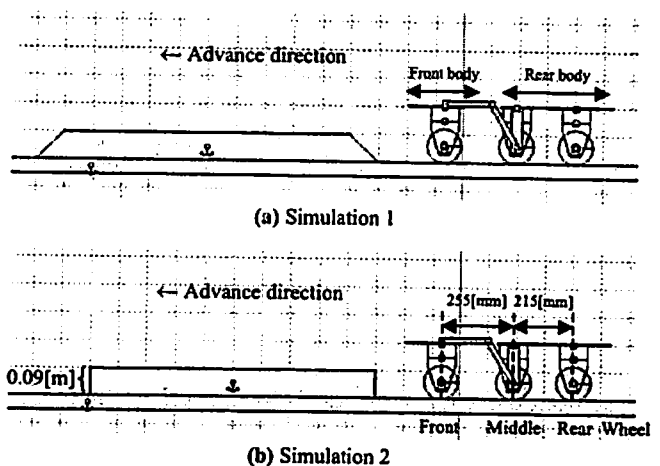

the length is 1 m. In simulation 2, the vehicle passes over the step as shown in Figure 10(b). The height of the step is 0.09 m and the length is 1 m. We compare the result by our proposed controller with the result utilizing standard controller, which uses fixed control reference and does not consider the body shape. Both controllers utilized our PID-based control scheme as shown in Section 3.4.

We use the Working Model 2D as a physical simulator and MATLAB. Both applications are linked by dynamic data exchange function, which is equipped on Windows OS.

4.2 Simulation result

Tables II and III show these simulation results. The slip ratio (Yoshida and Hamano, 2001) of the wheel and the disturbance ratio (Chugo et al., 2005a, b) of the wheel are calculated by equations (20) and (21), respectively. The disturbance ratio means the error ratio of the rotation velocity:

$$\hat{s} = \frac{r\omega - v_{\omega}}{r\omega} \tag{20}$$

$$\hat{d} = \frac{\omega_{ref} - \omega}{\omega} \tag{21}$$

$\omega$  is the rotation speed of the actuator and  $\omega_{ref}$  is the reference value of wheel rotation velocity.  $r$  and  $v_{\omega}$  indicate the radius of the wheel and the vehicle speed (we measure the axle of middle wheel) in world coordination, respectively.

By these simulations, we verified the proposed controller improves the performance of the step overcoming. The slip ratio of the wheel decreases 44 percent in the simulation (1) and 45 percent in the simulation (2). And the disturbance ratio of the wheel decreases 41 percent in the simulation (1) and 55 percent in the simulation (2). The performance of our proposed controller is better than one of the standard controller with fix references regardless of the angle of the step.

Furthermore, the load which is applied to one wheel is distributing. For example, the difference between disturbance ratio of the middle and rear wheel decreases to 50 percent in the simulation (1) and 33 percent in the simulation (2). This means wheels can transmit its traction force to the ground more effectively using control references according to the body shape.

Table II The error result of simulation (1) (percent)

	Reference	Front wheel	Middle wheel	Rear wheel	Average
Slip	Fixed	7.5	6.7	7.0	7.1
	Proposed	4.0	4.0	4.0	4.0
Disturbance	Fixed	2.6	1.8	2.2	2.2
	Proposed	0.7	1.1	0.9	0.9

Table III The error result of simulation (2) (percent)

	Reference	Front wheel	Middle wheel	Rear wheel	Average
Slip	Fixed	17.7	16.4	15.6	16.6
	Proposed	8.3	9.6	9.3	9.1
Disturbance	Fixed	2.7	1.9	2.5	2.0
	Proposed	0.8	1.3	1.1	1.1

4.3 Experiment

Here, we verify the performance of our control method by the experiment. In this experiment, the prototype vehicle passes over the step and we verify about two topics. One topic is the height of the step which the vehicle can climb up. The other topic is the slippage and the rotation error of the wheels when the vehicle passes over 0.09 m height step. We measure the moving velocity of the axle of the middle wheel using the motion capture system as the vehicle speed. As the same as simulation, we compare the result by our proposed controller with the result utilizing standard controller, which uses fixed control reference and does not consider the change of body shape during step climbing.

As the result of the experiment, the vehicle can pass over the 0.128 m height step with our proposed controller as shown in Figure 11. With standard controller, the vehicle can pass over the only 0.096 m height step.

When the vehicle passes over the 0.09 m height step, the slip ratio of the wheel decreases to 60 percent and the disturbance ratio of the wheel decreases to 51 percent by our proposed control scheme as shown in Table IV. As the results, the vehicle can pass over the 0.09 m height step more smoothly with our proposed controller as Figure 12.

Figure 13 shows the control reference of our proposed controller during passing over 0.9 m height step. Usually, the control reference of the wheel which contacts the step is larger than the references of other wheels which are on the flat ground. From Figure 12, when the front wheel contacts the

Figure 11 Passing over the 128 mm height step


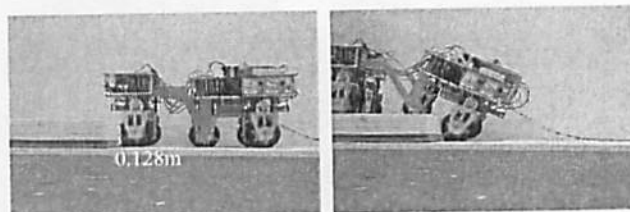


Table IV The error result of experiment (percent)

	References	Front wheel	Middle wheel	Rear wheel	Average
Slip	Fixed	18.8	17.9	18.4	18.4
	Proposed	10.8	12.0	10.4	11.1
Disturbance	Fixed	12.6	11.1	11.9	11.9
	Proposed	6.2	5.1	7.0	6.1

Figure 12 Passing over the 90 mm height step

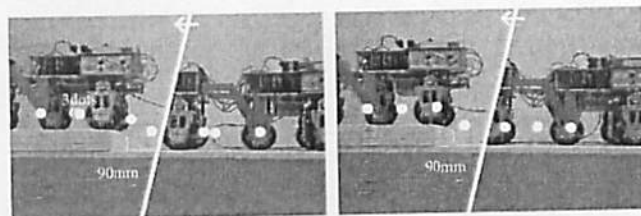


(a) With fixed reference (b) With proposed reference

Note: White points are plotted at every 0.3 [sec]




Figure 13 Control references during step climbing

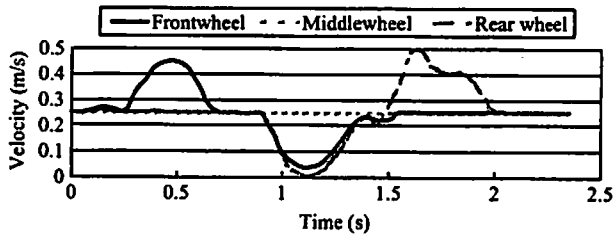

step, its reference is larger than one of other wheels. As the same, when the middle wheel contacts the step and when the rear wheel contacts it, its reference is larger than one of other wheels. Therefore, we can verify our proposed controller derives the reference of each wheel coordinated according to the body configuration.

Figure 14 (a) and (b) show the slip ratio by standard controller with fixed control reference and proposed controller, respectively. As the same, Figure 14 (c) and (d) show each disturbance ratio. In Figure 14 (a) and (b), there

Figure 14 The result of the experiment

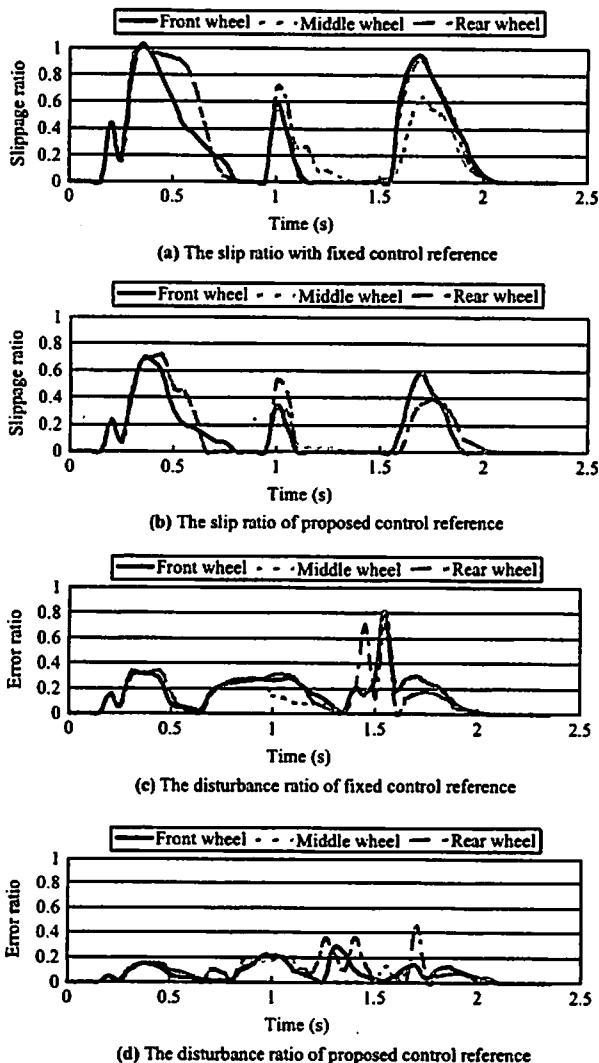

are three peaks in both cases. They show the contact between the step and the front, middle and rear wheel and at that time, the change of body shape is large. Using proposed control references, three peaks are reduced and this means the modification of wheel control reference is useful especially when the vehicle body changes largely. In Figure 14 (c) and (d), the disturbance ratio also reduced during step-overcoming evenly. This means that using control reference according to the body shape, the load is distributed to each wheel equally and each wheel can rotate according to their reference.

From these results, our proposed controller derives suitable control reference according to the change of body configuration. As the result, our controller reduces the slippage and the rotation error of the wheels. Furthermore, our method improves the vehicle's performance of the step-overcoming. Therefore, our proposed control method is effective for passing over the step for the vehicle with passive linkages.

5. Conclusions

In this paper, we propose the wheel control method according to change of vehicle's body shape. We discuss the kinematic model referring to the body configuration. Using this method, the controller can adjust the suitable wheel control references when the vehicle passes over the obstacles changing its body shape.

We verified the effectiveness of our proposed method by the computer simulations and experiments using our prototype. Utilizing our proposed control scheme, the slip ratio and the disturbance ratio of the wheel reduces when the vehicle passes over the step and its step-overcoming performance is improved. It is effective not only the step but also other obstacles, for example, the slopes.

As our future works, we will consider the motion planning method based on the environment information.

References

Asama, H., Sato, M., Bogoni, L., Kaetsu, H., Matsumoto, A. and Endo, I. (1995), "Development of an omni-directional mobile robot with 3 DOF decoupling drive mechanism", *Proceedings of the 1995 IEEE International Conference on Robotics and Automation*, Nago, pp. 1925-30.

Bickler, D.B. (1993), "A new family of JPL planetary surface vehicles", *Intl. Symp. Missions, Technologies, and Design of Planetary Mobile Vehicles*, CNES, Paris, pp. 301-6.

Campion, G., Bastin, G. and Andrea-Novel, B.D. (1996), "Structural properties and classification of kinematic and dynamic models of wheeled mobile robots", *IEEE Transactions on Robotics and Automation*, Vol. 12 No. 1, pp. 47-62.

Carlisle, B. (1979), "An omni-directional mobile robot", *Development in Robotics*, IFS Publications, Bedford, pp. 79-87.

Chugo, D., Kawabata, K., Kaetsu, H., Asama, H. and Mishima, T. (2003), "Development of omni-directional vehicle with step-climbing ability", *Proceedings of the 2003 IEEE International Conference on Robotics and Automation*, Taipei, pp. 3849-54.

Chugo, D., Kawabata, K., Kaetsu, H., Asama, H. and Mishima, T. (2005a), "Development of a control system for an omni directional vehicle with step-climbing ability", *Advanced Robotics*, Vol. 19 No. 1, pp. 55-71.

- Chugo, D., Kawabata, K., Kaetsu, H., Asama, H. and Mishima, T. (2005b), "Mechanical design of step-climbing vehicle with passive linkages", *Proceedings of the 8th International Conference on Climbing and Walking Robots*, Springer, London, pp. 287-94.
- Endo, G. and Hirose, S. (1999), "Study on Roller-Walker: system integration and basic experiments", *Proceedings of the 1999 IEEE International Conference on Robotics and Automation*, Detroit, pp. 2032-7.
- Estier, T., Cravsaz, Y., Merminod, B., Lauria, M., Pignet, R. and Siegwart, R. (2000), "An innovative space rover with extended climbing abilities", *Video Proceedings of Space and Robotics the 4th International Conference and Exposition on Robotics in Challenging Environments*, Albuquerque, NM.
- Ferriere, L.D. and Campion, G. (1996), "Design of omnimobile robot wheels", *Proceedings of the 1996 IEEE International Conference on Robotics and Automation*, Minneapolis, MN, pp. 3664-70.
- Hirose, S. and Amano, S. (1993), "The VUTON: high payload, high efficiency holonomic omni-directional vehicle", *Proceedings of the 6th Symposium on Robotics Research*, Hidden Valley, PA, pp. 253-60.
- Hirukawa, H., Kajita, S., Kanehiro, F., Kaneko, K. and Isozumi, T. (2005), "The human-size humanoid robot that can walk, lie down and get up", *International Journal of Robotics Research*, Vol. 24 No. 9, pp. 755-69.
- Ichikawa, M. (1995), "Wheel arrangements for wheeled vehicle", *Journal of the Robotics Society of Japan*, Vol. 13 No. 1, pp. 107-12.
- Lamon, P. and Siegwart, R. (2003), "3D-Odometry for rough terrain - towards real 3D navigation", *Proceedings of the 2003 IEEE International Conference on Robotics and Automation*, Taipei, pp. 440-5.
- Stone, H.W. (1996), "Mars pathfinder microrover: a low-cost, low-power spacecraft", *Proc. of the 1996 AIAA Forum on Advanced Developments in Space Robotics*, Madison, WI.
- Thianwiboon, M., Sangveraphunsiri, V. and Chancharoen, R. (2001), "Rocker-bogie suspension performance", *Proceedings of the 11th International Pacific Conference in Automotive Engineering*, IPC2001D079, Shanghai.
- Wada, M. and Asada, H. (1999), "Design and control of a variable footprint mechanism for holonomic omnidirectional vehicles and its application to wheelchairs", *IEEE Transactions on Robotics and Automation*, Vol. 15 No. 6, pp. 978-89.
- Yamashita, A., Asama, H., Kaetsu, H., Endo, I. and Arai, T. (2001), "Development of a step-climbing omni-directional mobile robot", *Proceedings of the 2001 International Conference on Field and Service Robotics*, Espoo, pp. 327-32.
- Yoshida, K. and Hamano, H. (2001), "Motion dynamic of a rover with slip-based traction model", *Proceedings of the 2002 IEEE International Conference on Robotics and Automation*, Washington, DC, pp. 3155-60.

#### Corresponding author

Daisuke Chugo can be contacted at: [chugo@is.uec.ac.jp](mailto:chugo@is.uec.ac.jp)

# Author guidelines

## Industrial Robot

### Copyright

Articles submitted to the journal should be original contributions and should not be under consideration for any other publication at the same time. Authors submitting articles for publication warrant that the work is not an infringement of any existing copyright and will indemnify the publisher against any breach of such warranty. For ease of dissemination and to ensure proper handling of use, papers and contributions become the legal copyright of the publisher unless otherwise agreed. Copyright is assigned through the use of a digital signature as part of the submission process in ScholarOne Manuscripts.

### Editorial objectives

*Industrial Robot* provides up-to-date coverage of international activities that relate to the design and application of industrial and service robot systems. Coverage is essentially of a practical nature and designed to be of material benefit to those working in the field. Proven applications are covered together with company news and new product information.

The journal includes a substantial section reserved for "Research articles". Although you will find more academic in content than other articles in the journal, emphasis will be placed on fundamental concepts and application points as regards academic analysis. This will ensure that the research articles remain accessible to all subscribers regardless of their particular areas of expertise.

### The reviewing process

Each paper is reviewed by the Editor and, if it is judged suitable for this publication, it then sent to two referees for double blind peer review. Based on their recommendations, the Editor then decides whether the paper should be accepted or rejected. The Editor may make use of the electronic software for checking the originality of submissions received.

### Essential Editing Services

The Editorial Network can recommend the services of a number of freelance copy editors, all of whom are experienced authors, to contribute to improve the standard of English in their paper before submission. This is particularly useful for those whose first language is not English. Please see [www.emeraldinsight.com/editservice](http://www.emeraldinsight.com/editservice) for further details.

Submissions are made using ScholarOne Manuscripts. Registration and access is available at <http://mc.manuscriptcentral.com/indrobot> Full information and guidance on using ScholarOne Manuscripts is available at the Emerald ScholarOne Manuscripts Support Centre: <http://mc.emeraldinsight.com>

### Registering on ScholarOne Manuscripts

If you have not yet registered on ScholarOne Manuscripts, please follow the instructions below:

- Please log on to <http://mc.manuscriptcentral.com/indrobot>
- Click on "Create Account"
- Follow the on-screen instructions, filling in the requested details before
- Your username will be your e-mail address and you have to input a password of at least eight characters in length and containing two or more numbers
- Click "finish" and your account has been created.

### Submitting an article to *Industrial Robot* on ScholarOne Manuscripts

Please log on to <http://mc.manuscriptcentral.com/indrobot> with your username and password. This will take you through to the Welcome page

- (To consult the Author Guidelines for this journal, click on the Home Page link in the Resources column)
- Click on the Author Centre button
- Click on the submit a manuscript link which will take you through to the Manuscript Submission page
- Complete all fields and Browse to upload your article
- When all required sections are completed, preview your pdf proof
- Submit your manuscript.

### Manuscript requirements

The manuscript will be considered to be the definitive version of the article and should be in MS WORD format. Please use single line spacing to conserve paper during the review and production processes. Good electronic copies of all figures and tables should also be provided. All manuscripts should be run through a UK English spell check prior to submissions.

As a guide, articles should be approximately 2,000 and a 4,000 words in length. A title or not more than eight words should be provided. A brief autobiographical note should be supplied including full name, affiliation, e-mail address and full international contact details. Authors must supply a structured abstract set out under 4-6 sub-headings: Purpose; Methodology/approach; Findings; Implications/Limitations either for practice, or for policy, or for society; and the Originality/value of the paper. Maximum is 250 words in total. In addition provide up to six keywords which encapsulate the principal topics of the paper and categorise your paper under one of these classifications: Research paper, Viewpoint, Technical paper, Conceptual paper, Case study, Literature review or General review; for more information and guidance on structured abstracts visit: [www.emeraldinsight.com/structuredabstracts](http://www.emeraldinsight.com/structuredabstracts)

Notes or Endnotes should be used only if absolutely necessary and must be identified in the text by consecutively numbered, enclosed in square brackets and listed at the end of the article.

### Figures should be supplied within the article itself.

All figures (charts, diagrams, line drawings and photographic images) should be submitted in electronic form. Figures should be of clear quality and numbered consecutively with arabic numerals. Graphics may be supplied in colour to facilitate their appearance in colour on the online database.

### Figures created in colour on the online database.

Electronic figures created in other applications should be copied from the original software and pasted into a blank MS Word document or saved and imported into an MS Word document by choosing "Insert" from the menu bar, "Picture" from the drop-down menu and selecting "From file..." to select the graphic to be imported.

For figures which cannot be supplied in MS Word, acceptable standard image formats are: .pdf, .ai, .wmf and .eps. If you are unable to supply graphics in these formats then please ensure they are: .tif, .jpeg, or .bmp at a resolution of at least 300dpi and at least 10cm wide.

To prepare screenshots, simultaneously press the "Alt" and "Print screen" keys on the keyboard, open a blank Microsoft Word document and simultaneously press "Ctrl" and "V" to paste the image. (Capture all the contents/windows on the computer screen to paste into MS Word, by simultaneously pressing "Ctrl" and "Print screen".)

For photographic images good quality original photographs should be submitted. If supplied electronically they should be saved as .tif or .jpeg files at a resolution of at least 300dpi and at least 10cm wide. Digital camera settings should be set at the highest resolution/quality possible.

In the text of the paper the preferred position of all figures should be indicated by typing on a separate line the words "Take in figure (no)". Tables should be typed and included as part of the manuscript. They should not be submitted as graphic elements. Supply succinct and clear captions for all tables, figures and plates. References to other publications must be in Harvard style and carefully checked for completeness, accuracy and consistency. This is very important in an electronic environment because it enables your readers to exploit the Reference Linking facility on the database and link back to the works you have cited through CrossRef. You should include all author names and initials and give your journal title in full. (Adams, 2006); citing both names if there are two authors, e.g. (Adams and Brown, 2006), or (Adams et al., 2006) when there are three or more authors. At the end of the paper a reference list in alphabetical order should be supplied.

**For books:** surname, initials (year), title of book, publisher, place of publication. Harrow, R. (2005). *No Place to Hide*. Simon & Schuster, New York, NY.

**For book chapters:** surname, initials (year), "chapter title", editor's surname, initials (Ed.), title of book, publisher, place of publication, pages. Stanbasyk, M. (Ed.), *Creating the Discipline of Knowledge Management*, Elsevier, New York, NY, pp. 15-20.

**For journals:** surname, initials (year), "title of article", journal name, volume number, pages. Capizzi, M.T. and Ferguson, R. (2005) "Tertiary trends for the twenty-first century", *Journal of Consumer Marketing*, Vol. 22 No. 2, pp. 73-80.

**For published conference proceedings:** surname, initials (year of publication), "title of paper", in surname, initials (Ed.), title of published proceeding which may include place and date(s) held, publisher, place of publication, page numbers. Jakkilinki, R., Georgievski, M. and Sharpe, N. (2007), "Connecting destinations with an ontology-based e-tourism planner", *Information and Communication Technologies in Tourism 2007 Proceedings of the International Conference in Ljubljana, Slovenia*, 2007 Springer-Verlag, Vienna, pp. 23-32.

**For unpublished conference proceedings:** surname, initials "title of paper", paper presented at name of conference, place of conference, date of conference, available at: URL if freely available on the internet (accessed date). Aumuelle, D. (2005), "Semantic authoring and retrieval within a wiki", paper presented at the European Semantic Web Conference (ESWC), Heraklion, Crete, 29 May-1 June, available at: <http://dbis.unileipzig.de/file/aumwelle05wksar.pdf> (accessed 20 February 2007).

**For working papers:** surname, initials (year), "title of article", working paper number, institution or organisation, place of organisation, date. Mazer, P. (2003), "How published academic research can inform policy decisions: the case of mandatory ration of audit appointments", working paper, Leeds University Business School, University of Leeds, Leeds, 28 March.

**For encyclopedia entries (with no author or editor):** title of encyclopedia (year), "title of entry", volume, edition, title of encyclopedia, publisher, place of publication, pages. *Encyclopaedia Britannica* (1926), "Psychology of culture contact", Vol. 1, 13th ed., Encyclopaedia Britannica, London and New York, NY, pp. 75-77.

**For newspaper articles (author(s) (author(s)):** surname, initials (year), "article title", newspaper, date, pages. Smith, A. (2008), "Money for old rope", *Daily News*, 21 January, pp. 1, 3-4.

**For newspaper articles (non-author(s)):** newspaper (year), "article title", date, newspaper, date, pages.

**For electronic sources:** If available online the full URL should be supplied at the end of the reference, as well as a date when the resource was accessed. Castle, B. (2005), "Introduction to web services for remote portlets", available at: [www.z38.ibm.com/developerworks/library/ms-wsfp/accsessed](http://www.z38.ibm.com/developerworks/library/ms-wsfp/accsessed) (12 November 2007).

Standalone URLs, i.e. without an author or date, should be included either within parentheses within the main text, or followed by a URL address at the end of the paper).

numerical within square brackets within the main text, or followed by a numeric address at the end of the paper).

# Authors' Charter

This highlights some of the main points of our Authors' Charter. For the full version visit:

**[www.emeraldinsight.com/charter](http://www.emeraldinsight.com/charter)**

## **Your rights as an author**

Emerald believes that as an author you have the right to expect your publisher to deliver:

- An efficient and courteous publishing service at all times
- Prompt acknowledgement of correspondence and manuscripts received at Emerald
- Prompt notification of publication details
- A high professional standard of accuracy and clarity of presentation
- A complimentary journal issue in which your article appeared
- Article reprints
- A premium service for permission and reprint requests
- Your moral rights as an author.

## **Emerald represents and protects moral rights as follows:**

- To be acknowledged as the author of your work and receive due respect and credit for it
- To be able to object to derogatory treatment of your work
- Not to have your work plagiarized by others.

## **The Emerald Literati Network**

The Emerald Literati Network is a unique service for authors which provides an international network of scholars and practitioners who write for our publications. Membership is a free and unique service for authors. It provides:

- A dedicated area of the Emerald web site for authors
- Resources and support in publishing your research
- Free registration of yourself and your work, and access to the details of potential research partners in Emerald Research Connections
- The opportunity to post and receive relevant Calls for Papers
- Information on publishing developments
- Awards for outstanding scholarship
- Usage information on authors, themes, titles and regions
- Access to tips and tools on how to further promote your work
- Awards for Excellence.

## **To discuss any aspect of this Charter please contact:**

Emerald Literati Network, Emerald Group Publishing Limited, Howard House, Wagon Lane,  
Bingley BD16 1WA, United Kingdom  
Telephone +44 (0)1274 777700  
E-mail: [literatinetwork@emeraldinsight.com](mailto:literatinetwork@emeraldinsight.com)

